




NTN Machinery Manufacturing Co., Ltd

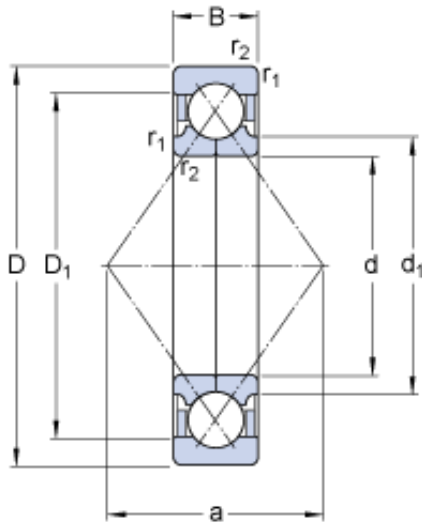

QJ 304 MA Bearing 2D drawings and 3D CAD models

20 mm x 52 mm x 15 mm SKF QJ 304 MA
angular contact ball bearings

Bearing No. QJ 304 MA

Size	52x20x15 mm
Bore Diameter	52 mm
Outer Diameter	20 mm
Width	15 mm
d	20 mm
D	52 mm
B	15 mm
d ₁	27.5 mm
D ₁	40.8 mm
a	25 mm
r _{1,2} - min.	1.1 mm
d _a - min.	27 mm
D _a - max.	45 mm
r _a - max.	1 mm
Basic dynamic load rating - C	32 kN
Basic static load rating - C ₀	21.6 kN
Fatigue load limit - P _u	0.93 kN
Reference speed	18000 r/min
Limiting speed	24000 r/min
Calculation factor - k _a	1.1
Calculation factor - e	0.95
Calculation factor - X	0.6
Calculation factor - Y ₀	0.58
Calculation factor - Y ₁	0.66



NTN Machinery Manufacturing Co., Ltd

Calculation factor - Y ₂	1.07
Category	Angular Contact Ball Bearings
Inventory	0.0
Manufacturer Name	SKF
Minimum Buy Quantity	N/A
Weight / Kilogram	0.184
EAN	7316576632235
Product Group	B00308
Enclosure	Open
Flush Ground	No
Rolling Element	Ball Bearing
Number of Rows of Balls	Single Row
Precision Class	ABEC 3 ISO P6
Maximum Capacity / Filling Slot	No
Snap Ring	No
Cage Material	Brass
Contact Angle	35 Degree 4 Point
Internal Clearance	C0-Medium
Number of Bearings	1 (Single)
Inch - Metric	Metric
Long Description	20MM Bore; 52MM Outside Diameter; 15MM Width; Open; No Flush Ground; Ball Bearing; Single Row of Balls; ABEC 3 ISO P6; No Filling Slot; No Snap Ring
Other Features	Split Inner Race
Category	Angular Contact Ball Bearing
UNSPSC	31171531
Harmonized Tariff Code	8482.10.50.28
Noun	Bearing



NTN Machinery Manufacturing Co., Ltd

Keyword String	Angular Contact
Manufacturer URL	http://www.skf.com
Manufacturer Item Number	QJ 304 MA
Weight / LBS	0.406
Outside Diameter	2.047 Inch 52 Millimeter
Width	0.591 Inch 15 Millimeter
Bore	0.787 Inch 20 Millimeter
inside diameter:	20 mm
precision rating:	ABEC 1 (ISO Class Normal)
outside diameter:	52 mm
cage material:	Brass
overall width:	15 mm
maximum rpm:	24000 RPM
internal clearance:	C0
finish/coating:	Uncoated
closure type:	Open
outer ring width:	15 mm
radial dynamic load capacity:	32 kN
fillet radius:	1 mm
radial static load capacity:	21.6 kN
series:	QJ
d_1	27.5 mm
D_1	40.8 mm
$r_{1,2}$ min.	1.1 mm
d_a min.	27 mm
D_a max.	45 mm
r_a max.	1 mm
Basic dynamic load rating C	32 kN
Basic static load rating C_0	21.6 kN
Fatigue load limit P_u	0.93 kN
Calculation factor A	0.00143



NTN Machinery Manufacturing Co., Ltd

Calculation factor e	0.95
Calculation factor X	0.6
Calculation factor Y_0	0.58
Calculation factor Y_1	0.66
Calculation factor Y_2	1.07
Mass bearing	0.18 kg