




NTN Machinery Manufacturing Co., Ltd

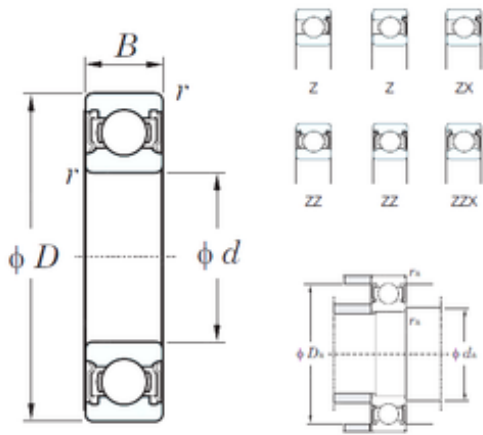

60 mm x 110 mm x 22 mm KOYO 6212ZZ deep groove ball bearings

Bearing No. 6212ZZ

6212ZZ Bearing 2D drawings and 3D CAD models

| | |
|-------------------------------|--------------------------|
| Size | 60x110x22 mm |
| Bore Diameter | 60 mm |
| Outer Diameter | 110 mm |
| Width | 22 mm |
| d | 60 mm |
| D | 110 mm |
| B | 22 mm |
| C | 22 mm |
| r min. | 1,5 mm |
| da min. | 68 mm |
| da max | 72,5 mm |
| Da max. | 102 mm |
| ra max. | 1,5 mm |
| Weight | 0,783 Kg |
| Basic dynamic load rating (C) | 52,4 kN |
| Basic static load rating (C0) | 36,2 kN |
| (Grease) Lubrication Speed | 5700 r/min |
| Category | Single Row Ball Bearings |
| Inventory | 0.0 |
| Manufacturer Name | KOYO |
| Minimum Buy Quantity | N/A |
| Weight / Kilogram | 0.841 |
| EAN | 0060579006643 |
| Product Group | B00308 |
| Enclosure | 2 Metal Shields |



NTN Machinery Manufacturing Co., Ltd

| | |
|---------------------------------|--|
| Precision Class | ABEC 1 ISO P0 |
| Maximum Capacity / Filling Slot | No |
| Rolling Element | Ball Bearing |
| Snap Ring | No |
| Internal Special Features | No |
| Cage Material | Steel |
| Internal Clearance | C0-Medium |
| Inch - Metric | Metric |
| Long Description | 60MM Bore; 110MM Outside Diameter; 22MM Outer Race Width; 2 Metal Shields; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features; C0-Medium Internal Clearance; Ste |
| Other Features | Deep Groove |
| Category | Single Row Ball Bearing |
| UNSPSC | 31171504 |
| Harmonized Tariff Code | 8482.10.50.68 |
| Noun | Bearing |
| Keyword String | Ball |
| Manufacturer URL | http://www.koyousa.com |
| Weight / LBS | 1.72622 |
| Outer Race Width | 0.866 Inch 22 Millimeter |
| Outside Diameter | 4.331 Inch 110 Millimeter |
| Inner Race Width | 0 Inch 0 Millimeter |
| Bore | 2.362 Inch 60 Millimeter |